

Model Information



■ Main Features

- 8x RS232
- 8x 16C550 UARTs (16 Byte FIFO)
- possible I/O-addresses 100h..7F8h
- no jumper, configured by software
- Software compatible with DOS, Windows, Linux, OS/2, Netware

[Contact Online...](#)

VScom 800 Pro

Quick Link: | [Main Features](#) | [More Pictures](#) | [Hardware Specifications](#) | [Ordering Information](#) |

■ More Pictures



Click on the thumbnails for the large picture ...

[>Back to top](#)

■ Hardware Specifications

Ports	8 x RS232 or RS422 (depending on connection-option)
UART	4x 16C550 (16 Byte FIFO)
Address	100h .. 7F8h
Interrupts	IRQ2 .. IRQ15, supports Interruptsharing
Speed	max. 921 kbps
Bus interface	ISA
Connectors	1x DB62 female
Size	L14.5cm x H10.0cm
Temperature	0°C - 55°C
Operating Systems supported	compatible to DOS, Windows 3.x to 7, Server 2000 to 2008 R2 OS/2, Unix, Linux and Netware
Driver	High-Speed Mode driver for Windows 95/98/SE/ME, NT
Configuration	DOS Utility, by Windows driver

[>Back to top](#)

■ Ordering Information

Article No.	431
Product Name	VScom 800 Pro
Packing List	VScom 800 Pro, disk, German documentation


[>Back to top](#)

* Specifications are subject to change without notice.

* All trademarks and brands are property of their rightful owners.

VScom 800 Pro

[>Back](#)

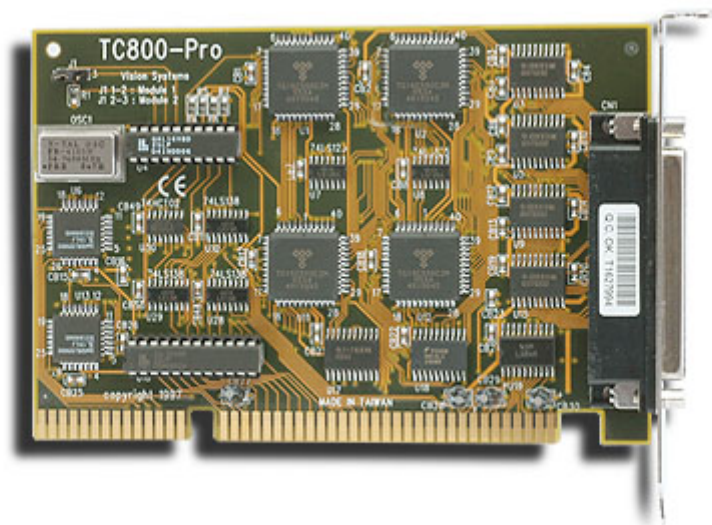

(2017 Jul 27)