


Model Information

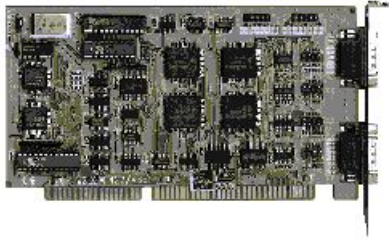

■ Main Features


- 4x RS422/485 optical isolated
- 4x 16C550 UARTs (16 Byte FIFO)
- Autoswitch
- no jumper, configured by software
- Software compatible with DOS, Windows, Linux, OS/2, Netware

[Contact Online...](#)

VScom 400i Pro

Quick Link: | [Main Features](#) | [More Pictures](#) | [Hardware Specifications](#) | [Ordering Information](#) |

■ More Pictures



Click on the thumbnails for the large picture ...

[>Back to top](#)

■ Hardware Specifications

Ports	4 x RS422/RS485
UART	4x 16C550 (16 Byte FIFO)
Address	100h .. 7F8h
Interrupts	IRQ2 .. IRQ15
Speed	max. 921 kbps
Bus interface	ISA
Connectors	2x DB9 male, 2x DB9 male (2. Slot)
Size	L17.4cm x H10.0cm
Temperature	0°C - 55°C
Operating Systems supported	compatible to DOS, Windows 3.x to 7, Server 2000 to 2008 R2 OS/2, Unix, Linux and Netware
Driver	High-Speed Mode driver for Windows 95/98/SE/ME, NT
Configuration	DOS Utility, by Windows driver

[>Back to top](#)

■ Ordering Information

Article No.	444
Product Name	VScom 400i Pro
Packing List	VScom 400i Pro, cable, driverdisk, English documentation


[>Back to top](#)

* Specifications are subject to change without notice.

* All trademarks and brands are property of their rightful owners.

VScom 400i Pro

[>Back](#)

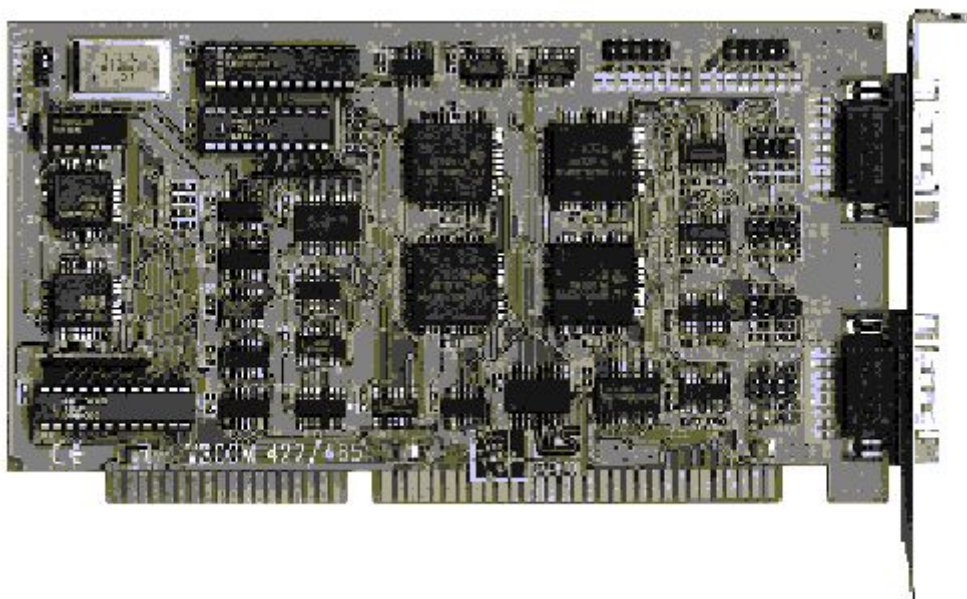

(2017 Jul 27)