


## Model Information



### ■ Main Features

- 4x RS232
- 4x 16C550 UARTs (16 Byte FIFO)
- possible I/O-addresses 100h..7F8h
- no jumper, configured by software
- Software compatible with DOS, Windows, Linux, OS/2, Netware

[Contact Online...](#)

# VScom 400 Pro

Quick Link: | [Main Features](#) | [More Pictures](#) | [Hardware Specifications](#) | [Ordering Information](#) |

### ■ More Pictures



Click on the thumbnails for the large picture ...

[>Back to top](#)

### ■ Hardware Specifications

<b>Ports</b>	4 x RS232
<b>UART</b>	4x 16C550 (16 Byte FIFO)
<b>Address</b>	100h .. 7F8h
<b>Interrupts</b>	IRQ2 .. IRQ15, supports <b>Interruptsharing</b>
<b>Speed</b>	max. 921 kbps
<b>Bus interface</b>	ISA
<b>Connectors</b>	1x DB37 female
<b>Size</b>	L13.7cm x H10.0cm
<b>Temperature</b>	0°C - 55°C
<b>Operating Systems supported</b>	compatible to DOS, Windows 3.x to 7, Server 2000 to 2008 R2 OS/2, Unix, Linux and Netware
<b>Driver</b>	High-Speed Mode driver for Windows 95/98/SE/ME, NT
<b>Configuration</b>	DOS Utility, by Windows driver

[>Back to top](#)

### ■ Ordering Information

<b>Article No.</b>	477
<b>Product Name</b>	VScom 400 Pro
<b>Packing List</b>	VScom 400 Pro, cable (DB37 to 4 x DB25 male, cablelength 30 cm), disk, German documentation

[>Back to top](#)


\* Specifications are subject to change without notice.

\* All trademarks and brands are property of their rightful owners.

---

## VScom 400 Pro

[>Back](#)

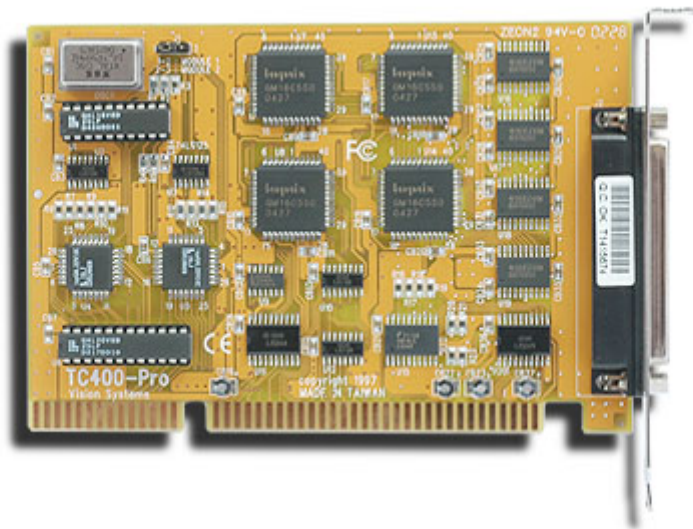

(2017 Jul 27)