

Model Information



■ Main Features

- Ti Sitara AM3354 @ 720MHz, 256MB DDR2
- 720p Video
- 1 x microSD, 1 x CFAST
- 2 x LAN
- 1 x USB 2.0 OTG
- 2 x USB 2.0 Host
- 2 x RS232/422/485
- 1 x CAN Bus
- 8 x Digital-I/O
- 1 x I²C
- 1 x SDIO-Slot for Wi-Fi
- 1 x mPCIe-slot for 3G-Modem
- 1 x Console Port
- Low Power, fanless
- Debian GNU/Linux
- DIN RAIL mountable

[Contact Online...](#)

Alekto 2

Quick Link: | [Main Features](#) | [More Pictures](#) | [Overview](#) | [System](#) | [Serial Ports](#) | [Power and Environment](#) | [Mechanical](#) | [Software Specifications](#) | [Ordering Information](#) | [Optional accessories](#) |

■ More Pictures



Click on the thumbnails for the large picture ...

[>Back to top](#)

■ Overview

The OnRISC Alekto 2 is a RISC industrial embedded computer based on ARM Cortex-A8 with NEON SIMD Coprocessor. The great variety of interfaces like LAN, CFAST, USB, I²C, serial interface, digital I/O plus more options makes it easy to connect various industrial devices to the OnRISC.

Compact dimensions and DIN Rail mounting capability make the OnRISC to a space saving and flexible mounting industrial computer. It is feasible to be installed even in space limited environments. The internal microSD slot protects the system software against accidentally removal.

The miniPCIe slot provides opportunities for wireless communication. For example WLAN cards are available, and the connected SIM slot allows to use GSM/3.5G modems.

Due to RISC based architecture the OnRISC has very small power consumption, so fanless heat dissipation is possible. Working in a wide temperature range from -10°C up to 50/75°C the OnRISC can be applied in under harsh industrial conditions. Therefore the OnRISC is downright designed for industrial automation.

The embedded computer runs full-featured Debian GNU/Linux on ARM operating system Kernel. This system is installable on a microSD card to place in the internal card-reader.

With Debian's repository database it is easy to install and update the free software on the OnRISC. The OnRISC is capable to act directly as a software development host, WEB, Mail, Print and Database server or as a desktop computer with X11 window manager and many more.

Windows Embedded Compact 7 is also available as operating system. More software is under development.

■ System

Hardware	<ul style="list-style-type: none"> • Ti Sitara AM3354 RISC CPU @ 720MHz • 256MB DDR2 • Real time clock
Mass Storage	<ul style="list-style-type: none"> • microSD-card as internal boot device, SD 2.0 / SDHC • CFast-Slot, SATA as data storage
Network	2x 100/10 MBit Ethernet
Display & Audio	Display <ul style="list-style-type: none"> • PowerVR SGX530 3D engine, resolution up to 720p • OpenGL-ES 1.1+2.0, Direct3D Mobile, OpenVG 1.0, OpenMax Audio <ul style="list-style-type: none"> • 2 channel 48kHz over display
Expansion Slots	<ul style="list-style-type: none"> • 1x SDIO for WLAN 802.11b/g • 1x miniPCIe via USB 2.0 (for WLAN, GPS, GSM/3G/4G card) • SIM card for GSM/3G/4G modems in miniPCIe slot
Peripherals	<ul style="list-style-type: none"> • 2x USB 2.0 as Host • 1x USB 2.0 OTG • 1x Console Port RS232 • 1x I²C • 2x RS232/422/485
CAN Bus	<ul style="list-style-type: none"> • 1x CAN High Speed, 20kbps up to 1Mbps • Signals: CAN_H, CAN_L, CAN_GND • VScom CAN API, CANFestival, CANopen, LinCAN
Digital Input/Output	<ul style="list-style-type: none"> • 8x TTL signals (64mA sink / 32mA source) • Configurable Input/Output (0/2/4/6/8 inputs) • Maskable IRQ for input signals • Terminal block connector
LED	<ul style="list-style-type: none"> • 1x Power, 1x 3G • LAN: 2x Link and Speed • Serial: 2x TxD and RxD
>Back to top	
■ Serial Ports	
Features	<ul style="list-style-type: none"> • 2x RS232/422/485 • Highspeed UART, 128 Byte FIFO (FT2232D) • RS232: up to 500 kbps • RS422/485: up to 3.0 Mbps
Available Modes	<ul style="list-style-type: none"> • RS232 • RS422 full duplex • RS485 4-wire, full duplex • RS485 2-wire, half duplex, without echo Configured by DIP-Switch or Software
Signals	<ul style="list-style-type: none"> • RS232: TxD,RxD, RTS,CTS, DTR,DSR, DCD, RI, GND • RS422: Tx+/-, Rx+/-, GND • RS485 2-wire: Data+/-, GND • RS485 4-wire: Tx+/-, Rx+/-, GND
RS485 Data Direction Control	by ARTc (Automatic Receive Transmit control)
>Back to top	
■ Power and Environment	
Power	<ul style="list-style-type: none"> • Input 9 - 32V DC • 1.5A @ 12V without Wi-Fi and 3G cards • 3-pin Terminal block connector, polarity neutral • Auxiliary Output 5V @max. 0.5A on Digital-I/O connector
Temperature	<ul style="list-style-type: none"> • Operating CFast mode: -10°C - 50°C, without Wi-Fi and 3G • Operating OTG mode: -10°C - 75°C, without Wi-Fi and 3G • Storage: -20°C - 85°C • Humidity: 10-85% non-condensing

MTBF	n.a.
Approvals	<ul style="list-style-type: none"> • EMC: FCC Class A, CE Class A • Environment: RoHS
>Back to top	
■ Mechanical	
Dimensions	161×112×53 mm ³ (W×L×H) 171×128×53 mm ³ including all connectors
Weight	0.8kg
Construction Material	1mm Metalsheet
Mounting	<ul style="list-style-type: none"> • DIN Rail • Wall mount
>Back to top	
■ Software Specifications	
Linux	Debian GNU/Linux Kernel 3.2 for ARM
Windows	Windows Embedded Compact 7
Android	to come soon
>Back to top	
■ Ordering Information	
Part No.	6820
Product Name	OnRISC Alekto 2
Packing list	OnRISC Alekto 2 system
>Back to top	
■ Optional accessories	
Power supply	Power adapter 12V @ 1.5A
Boot microSD	with Debian GNU/Linux installed (4/8GB)
Wi-Fi	SDIO card for WLAN 802.11b/g
GSM/UMTS	mPCIe card for 3G modem
Starter Kit	<ul style="list-style-type: none"> • OnRISC Alekto 2 system • 4GB microSD card for Linux inserted • Power adapter 12V @ 1.5A • Adapter cable for console port • Documentation and Development Software on DVD
>Back to top	

* Specifications are subject to change without notice.

* All trademarks and brands are property of their rightful owners.



Alekto 2 Top View

[>Back](#)



Alekto 2 Front Side

[>Back](#)




Debian on Alekto 2

[>Back](#)



Windows EC7 on Alekto 2

[>Back](#)

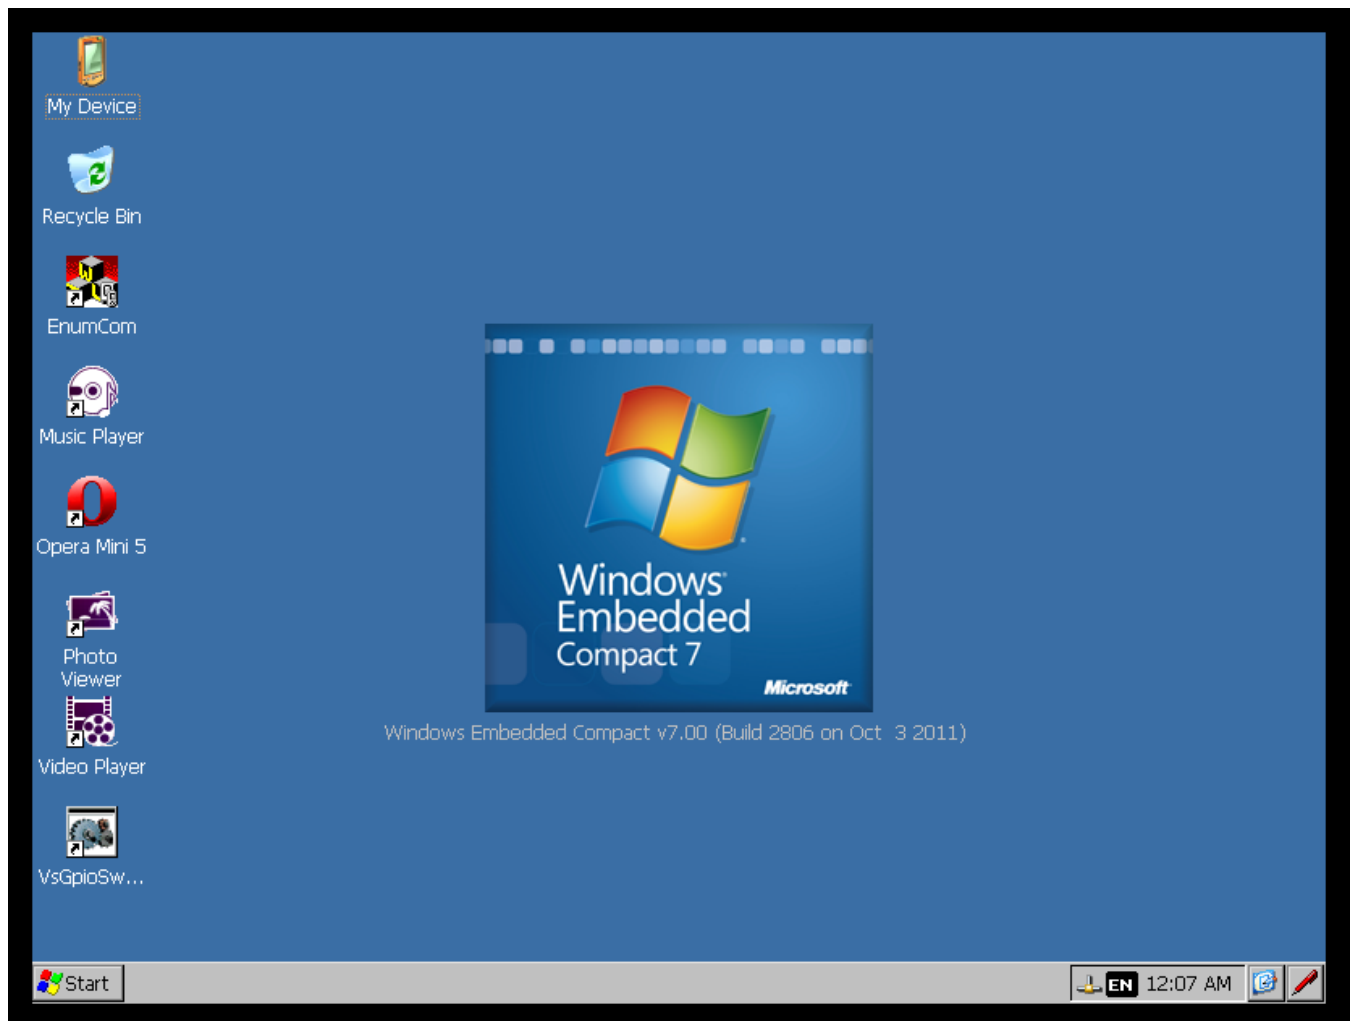

(2018 Feb 19)